


Primary Switched Battery Charging and Power Supply Unit GL0524 24V - 28V, 5A

Power factor correction

Hat-rail mounting

Convection heating

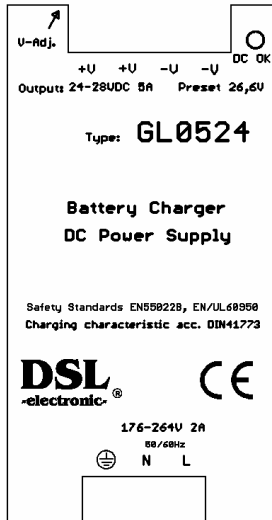

- Mains voltage 176 – 264V 47-63Hz
248 – 370V DC, Option 88 – 132V AC
- Soft start
- Long product lifetime
- Long-term short-circuit resistance (fold back)
- Overheating protection
- Safety cutoff
- Interference class acc. to curve B
- Low output ripple
- Charging characteristics acc. to DIN 41773

Application:

The battery charging and power supply unit GL0524 is used for charging high-quality lead or nickel-cadmium batteries and/or for supplying 24V DC circuits. The charging unit is especially suitable for use with diesel generators, where operating safety and long-term stability are necessary.

The primary clocked switching power supply with 100kHz technology is intended for use on the top-hat rail due to its high efficiency, low weight and low heat development. It is designed such that heat transport is vertical, meaning that other electronic units can be mounted on the hat rail about 1cm away from the power supply unit, thus saving space.

The output of the GL0524 is connected to the battery or DC supply via protective equipment. The output voltage / final charging voltage is also kept stable during large mains fluctuations (176 - 264VAC) and high temperature variations.

When the unit is operated for longer periods at high currents and in heated environments, the charging current set is reduced automatically in order to reduce the thermal load on the components.

Charging:

Normal Charging:

The empty battery is first charged at the constant current set. Before the preset final charging voltage is reached, the current gradually decreases. The gassing of the battery is limited and the continually reduced current causes the voltage to rise slowly until it reaches the final charging voltage. This characteristic I / U curve ensures the gradual charging of the battery.

Settings etc.:

The GL0524 charging unit is set to a battery voltage of 26.6V in no-load operation before leaving the factory. The final charging voltage is adjusted in no-load operation using the adjuster on the bottom of the unit (it is best to do this before mounting and wiring to the top-hat rail).

In mounting you should make sure that the PE connection (earthing clip) is connected so that the unit meets the interference requirements according to VDE and EN (see below).

The LED display on the front panel indicates that the charging and power supply unit is ready for operation (output voltage present). We recommend an additional battery undervoltage monitor for precise monitoring of the battery voltage when the GL0524 is used as a battery charging unit.

Series / Parallel Connection:

The output current or output voltage can be increased by connecting any desired number of GL0524 charging units to the outputs in parallel or in series. In order to ensure that the units are subjected to the same load in parallel operation, the final charging voltage in each case must be set to the same value before the units are connected.

Technical Data :

Type	Final charging Voltage Range	Current Max.	AC Current am Netz (max)	Fusing Prim. (Q1) Sek. (Q2) Acc. to EN60 898	Weight	Dimensions (mm , W x H x D)
GL0524	24 - 28V	10A	2,0A (230V)	4A B (230V) 16A B	0,8kg	65,5x125,2x100

Mounting	: 35mm Hat rail TS-35/7,5 or 15mm
Supply	: 176 - 264V 47 - 63Hz, 248 - 370V DC, Option 88 - 132V AC
Inrush consumption max.	: 60A/230VAC
Lost current	: <3,5mA / 240V
Efficiency	: 80%
Output voltage	: Range 24 - 28V, Hum and Noise <80mVpp
Output current	: 0 - 10A (rated)
Final charging voltage	: Tolerance 0,01% / °C
Charging characteristics	: IU - Char. acc. to DIN 41773 (appr. +/- 1% Tolerance) and DIN 57510 mit reduced Current (Wa) in the area of final charging voltage (appr. 3,5% of setting)
Soft start	: Appr. 600ms up to maximal output power
Overload	: 105 - 150% of rated output current (10A) according mains voltage, Output voltage and Temperature : Costant current limiting, Short circuit proofed, with Fold-back function : independent switch on after short circuit or overload
Over voltage	: 29 -33V, automatic swich off and switch on again
Ambient temperature	: -10°C bis +60°C , see derating-diagramm
Storing temperatures, hum.	: -20°C bis +85°C, 10 - 96%RH
Relative air humidity	: 20 - 90% RH not condensed
Vibration	: 10 - 500Hz, 2G 10min./1 period, 60min. in each achsis X, Y, Z
Type of protection	: IP00
Maintenance	: Maintenancefree
Service live	: > MTBF 136.800 hours , MIL HDBK-217F (25°C)
Safety standards	: UL508, UL60950, TÜV EN60950 Approved
Voltage protection	: Mains / Output 3kVAC, Mains / Screen 1,6kVAC, Output / Screen 0,5kVAC
Isolation resistance	: Mains / Output , Mains / Screen und Output / Screen 100MΩ/ 500VDC
Radio Interference	: EN55011, EN55022 (CISPR22) Kl. B
Harmonic Currents	: EN 61000-3-2, -3
Interference Immunity	: EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024, EN61000-6-2 (EN50082-2) Very heavy industrial environment, criterion A

Connecting example / Derating diagams

